

# MODEL 4603 Accelerometer

-54°C to +121°C Operating Range

Hermetically Sealed

High Sensitivity

MEMS Accelerometer

Flight  
Test  
Accelerometer

## DESCRIPTION

The Model 4603 is designed for both static and dynamic measurements in critical and demanding applications. The accelerometer is available in ranges from  $\pm 2$  to  $\pm 500g$  and offers outstanding thermal performance over the complete operating range from -54°C to +121°C. The model 4603 is hermetically sealed and incorporates an enhanced MEMS sensing element with integral over-range stops for high-g shock protection.




## FEATURES

- ◆  $\pm 2g$  to  $\pm 500g$  Dynamic Range
- ◆ Amplified Output
- ◆ Lower Power Consumption
- ◆ Gas Damping
- ◆ Integral Strain Relief
- ◆ DC, Low Frequency Response

## APPLICATIONS

- ◆ Flight Testing
- ◆ Flutter & Nacelle Vibrations
- ◆ Weapons Development
- ◆ Structural Testing
- ◆ Test & Instrumentation
- ◆ Performance Testing
- ◆ Transportation

## dimensions

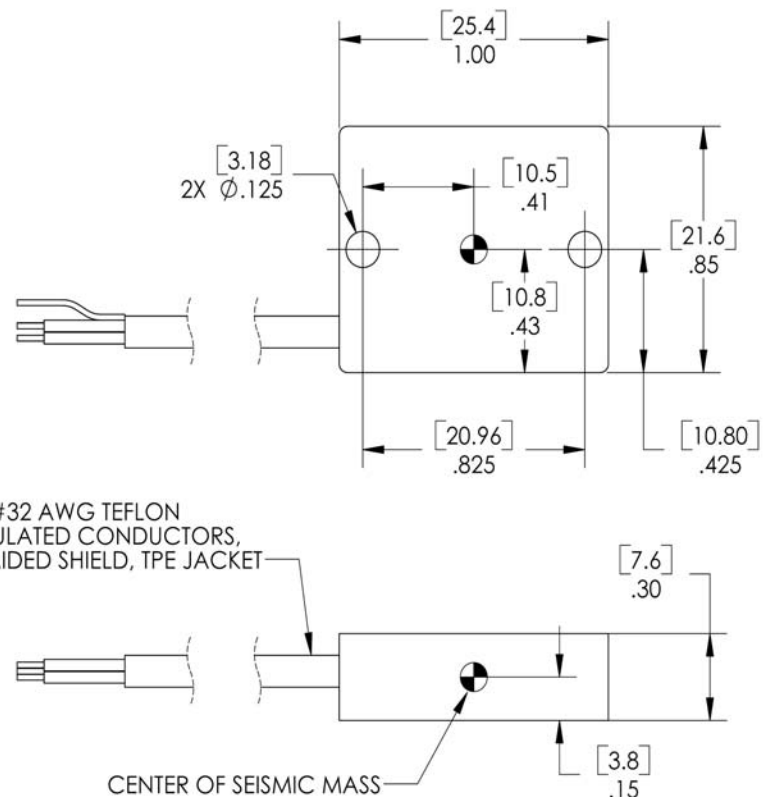

Vibration Sensors Technical Support:  
Tel: 949-716-5377  
Fax: 949-916-5677

measurement  
SPECIALTIES

# Model 4603 Accelerometer

## performance specifications


All values are typical at 25°C, 100Hz and 12Vdc excitation unless otherwise stated.

Measurement Specialties reserves the right to update and change these specifications without notice.

### PARAMETERS


DYNAMIC						
Range	+/-2	+/-10	+/-30	+/-50	UNITS	NOTES
Sensitivity	1000	200	67	40	mV/g	Typical
Frequency Response	0-250	0-400	0-700	0-1000	Hz	+/- 5%
DYNAMIC (continued)						
Range	+/-100	+/-200	+/-500		UNITS	NOTES
Sensitivity	20	10	4		mV/g	Typical
Frequency Response	0-1500	0-1500	0-1500		Hz	+/- 5%
Non-Linearity		+/-1			% FSO	+/-0.1% Typical
Transverse Sensitivity (Max)		+/-3			%	+/-1% Typical
Zero Acceleration Output		2.50+/-0.05			V	Maximum
Thermal Zero Shift (-40 to +100°C)		+/-0.02			% FSO/°C	Maximum
Thermal Sensitivity Shift (-40 to +100°C)		+/-0.02			%/°C	Maximum
Damping Ratio		0.70				Gas Damped
ELECTRICAL						
Excitation Voltage		8 to 36			Vdc	
Excitation Current		5.0			mA	Typical
Reference Voltage		2.5			Vdc	
Output Impedance		100			Ohms	Maximum
Insulation Resistance (@ 50Vdc)		100			MΩ	Minimum
Ground Isolation		Isolated				
PHYSICAL						
Base and Lid Material		Aluminum				Hard Anodized
Weight		8			grams	
Mounting		2x #4 or 2x M3 Screws				6 lb-in mounting torque
ENVIRONMENTAL						
Shock Limit		10,000			g's	
Operating Temperature		-54 to +121			°C	
Humidity		Electronics & sensor element hermetically sealed				

### electrical schematic

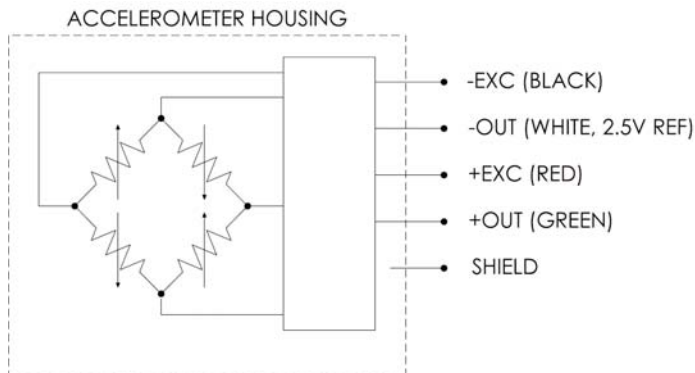

**Vibration Sensors Technical Support:**  
 Tel: 949-716-5377  
 Fax: 949-916-5677  
 Email: vibration@meas-spec.com

### ordering information

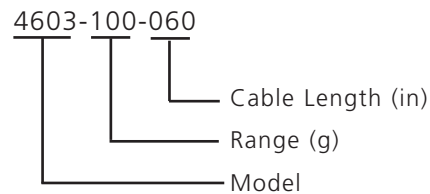

北京赛斯维测控技术有限公司  
 北京市朝阳区望京西路48号  
 金隅国际C座1002  
 电话: +86 010 8477 5646  
 传真: +86 010 5894 9029  
 邮箱: [sales@sensorway.cn](mailto:sales@sensorway.cn)

